


TIWINOK 品牌 11 系列高调心直线导轨 (俗称 HG) 法兰光孔型滑块尺寸表

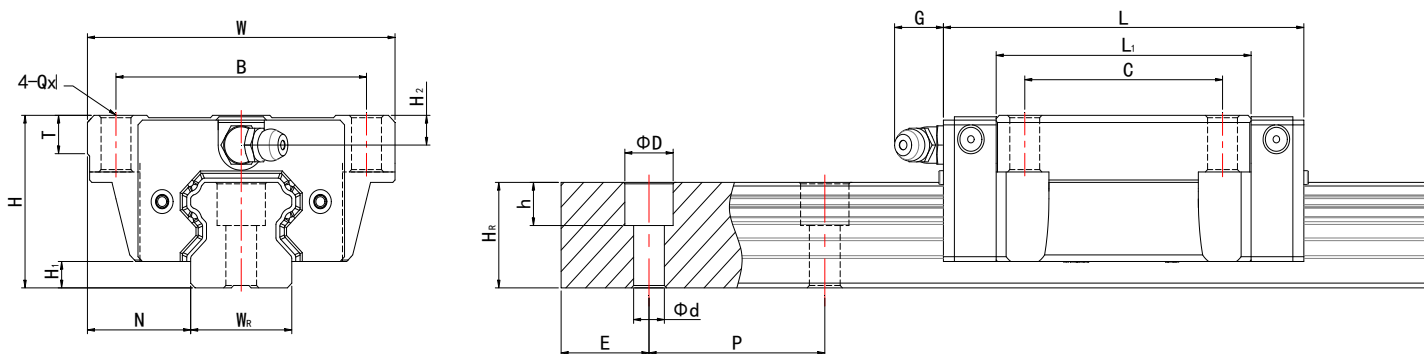

系列规格	滑块型号代码	组件尺寸 (mm)			滑块尺寸 (mm)								导轨尺寸 (mm)						导轨的固定螺栓尺寸 (mm)	基本动额定负荷 C (kN)	基本静额定负荷 CO (kN)	容许静力矩			重量			
		H	H1	N	W	B	C	L1	L	G	Q×I	T	H2	WR	HR	D	h	d				P	E	MR kN-m	MP kN-m	MY kN-m	滑块 kg	导轨 kg/m
HG15	11501	24	4.3	16	47	38	30	39.4	61.4	5.3	Φ4.5×7	6	3.95	15	15	7.5	5.3	4.5	60	20	M4x16	11.38	16.97	0.12	0.10	0.10	0.17	1.45
HG20	11508	30	4.6	21.5	63	53	40	50.5	77.5	12	Φ6×9.5	8	6	20	17.5	9.5	8.5	6	60	20	M5x16	17.75	27.76	0.27	0.20	0.20	0.40	2.21
	65.2							92.2	21.18													35.90	0.35	0.35	0.35	0.52		
HG25	11502	36	5.5	23.5	70	57	45	58	84	12	Φ7×10	8	6	23	22	11	9	7	60	20	M6x20	26.48	36.49	0.42	0.33	0.33	0.59	3.21
	78.6							104.6	32.75													49.44	0.56	0.57	0.57	0.80		
HG30	11507	42	6	31	90	72	52	70	97.4	12	Φ9×16	8.5	6.5	28	26	14	12	9	80	20	M8x25	38.74	52.19	0.66	0.53	0.53	1.09	4.47
	93							120.4	47.27													69.16	0.88	0.92	0.92	1.44		
HG35	11503	48	7.5	33	100	82	62	80	112.4	12	Φ9×18	10	9	34	29	14	12	9	80	20	M8x25	49.52	69.16	1.16	0.81	0.81	1.56	6.30
	105.8							138.2	60.21													91.63	1.54	1.40	1.40	2.06		
HG45	11504	60	9.5	37.5	120	100	80	97	139.4	12.9	Φ11×25	15	8.5	45	38	20	17	14	105	22.5	M12x35	77.57	102.71	1.98	1.55	1.55	2.79	10.41
	128.8							171.2	94.54													136.46	2.63	2.68	2.68	3.69		
HG55	11505	70	13	43.5	140	116	95	117.7	166.7	12.9	Φ14×17 (26)	17.5	12	53	44	23	20	16	120	30	M14x45	114.44	148.33	3.69	2.64	2.64	4.52	15.08
	155.8							204.8	139.35													196.20	4.88	4.57	4.57	5.96		
HG65	11506	90	15	53.5	170	142	110	144.2	200.2	12.9	Φ16×23 (30)	25	15	63	53	26	22	18	150	30	M16x50	163.63	215.33	6.65	4.27	4.27	9.17	21.18
	203.6							259.6	208.36													303.13	9.38	7.38	7.38	12.89		

注：表中 HG55、65 安装孔深度 I 括号中的数字为调整系列，订货前请提前确认安装孔深度。